

1 Main technical data:

Display content:10Numbers+30Prompts +5Touch keys Backlight color:White

Operating voltage:3.3±0.2V

Backlight current:60mA(3.0V)

Drive mode:1/3BIAS, 1/4DUTY

View angle:12:00

Character high:21.73mm, 5.45mm

Display type:FSTN, Positive


Display mode:Transflective

Connection way:Metal Pin


Operating temperature:-10~+50°C

Storage temperature:-10~+60°C


2 LCD Outline size :

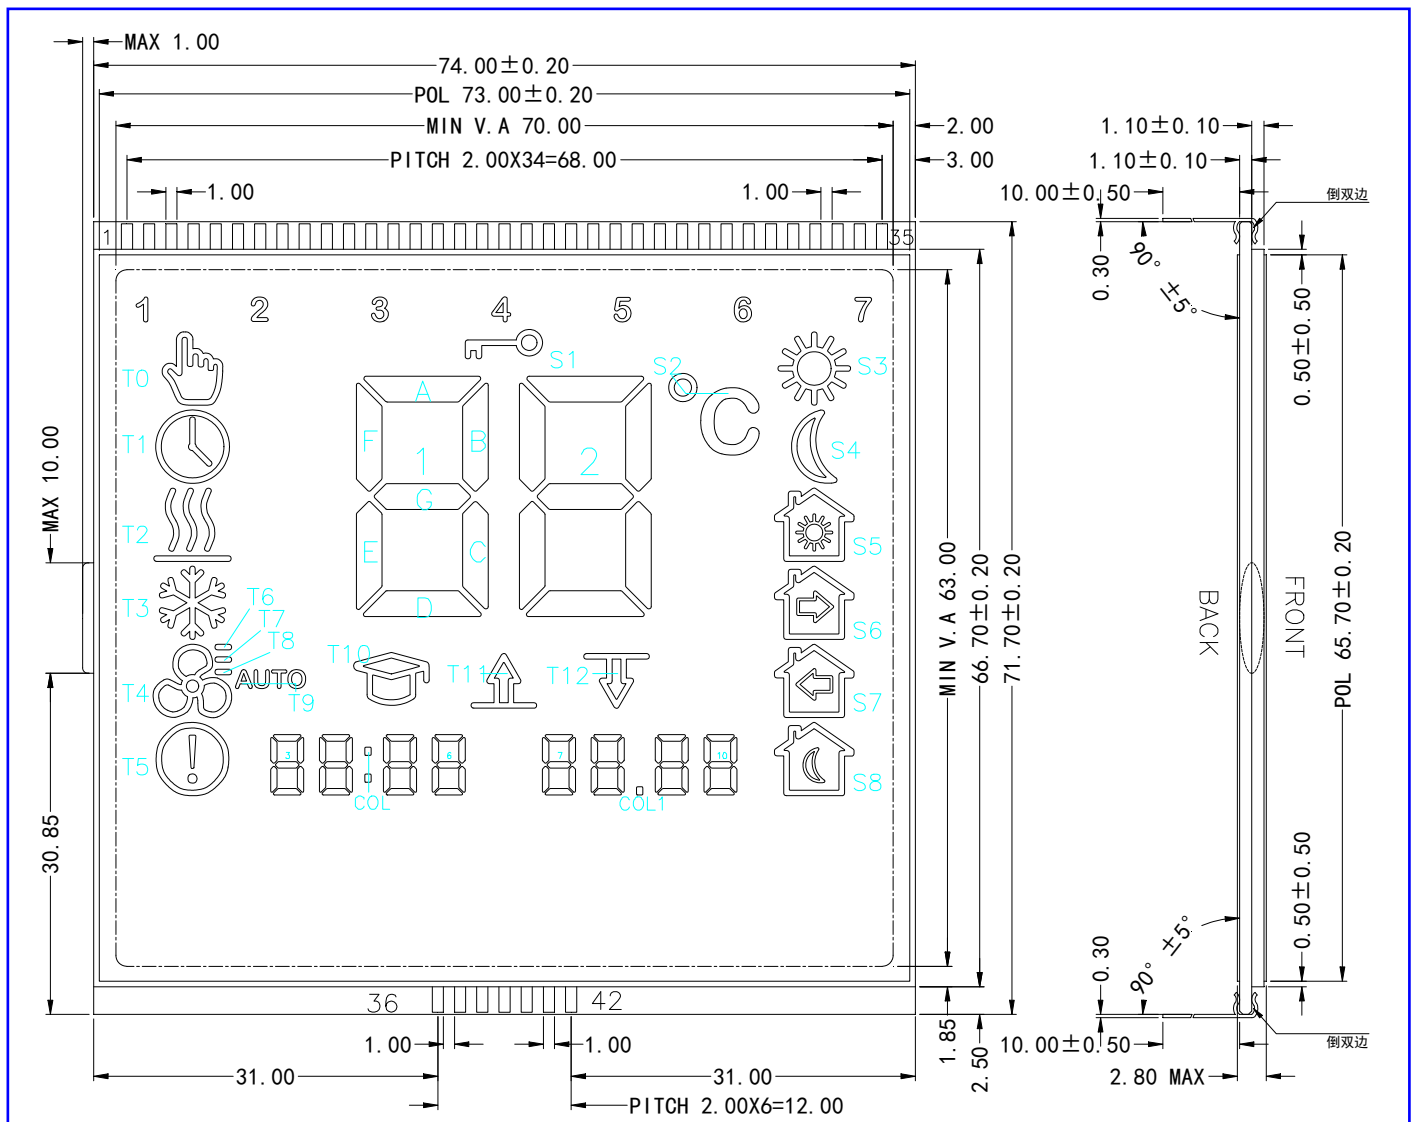


3. Silk printed:

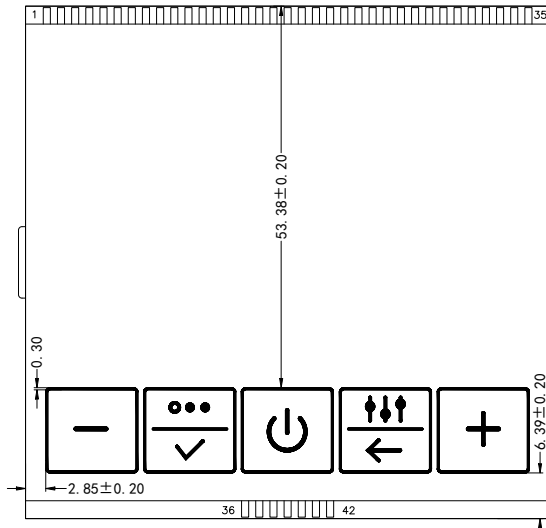

4. Touch keys:

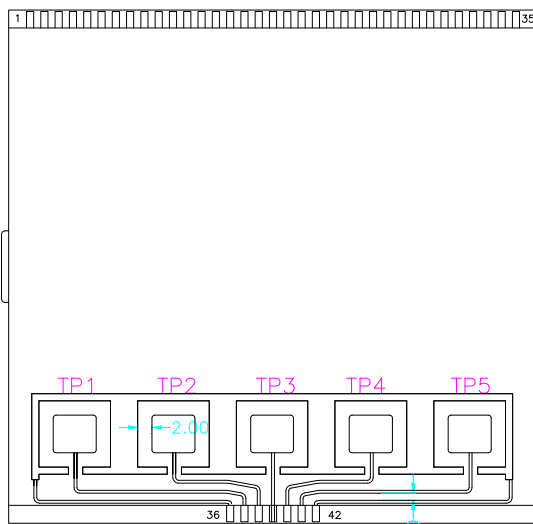

5. Pin instruction:

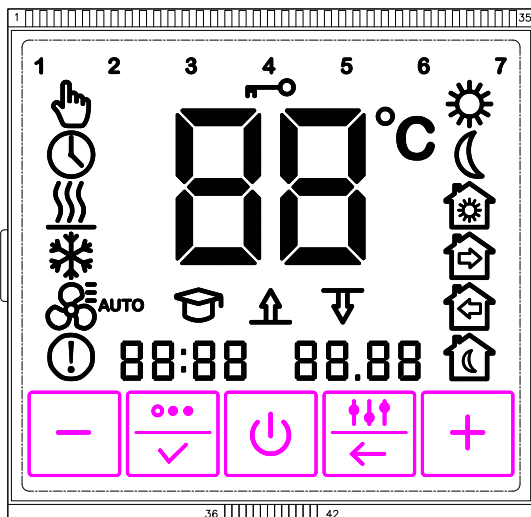

6. Pin instruction:

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM0	COM0	\	\	\	\	T0	T4	T5	3D	\	4D	COL	5D	\	6D	\	7D	\
COM1	\	COM1	\	\	1	T1	T8	T9	3E	3C	4E	4C	5E	5C	6E	6C	7E	7C
COM2	\	\	COM2	\	2	T2	T7	T10	3F	3G	4F	4G	5F	5G	6F	6G	7F	7G
COM3	\	\	\	COM3	3	T3	T6	T11	3A	3B	4A	4B	5A	5B	6A	6B	7A	7B

PIN	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	
COM1	8D	COL1	9D	\	10D	\	2B	2A	S1	1A	4	S2	S8	\	\	\	COM0	
COM2	8E	8C	9E	9C	10E	10C	2G	2F	1B	1F	5	S3	S7	\	\	COM1	\	
COM3	8F	8G	9F	9G	10F	10G	2C	2E	1G	1E	6	S4	S6	\	COM2	\	\	
COM4	8A	8B	9A	9B	10A	10B	T12	2D	1C	1D	7	\	S5	COM3	\	\	\	

PIN	36	37	38	39	40	41	42
触摸按键	GND	TP1	TP2	TP3	TP4	TP5	GND

7. Backlight size:

